

3 in 1 CCT& DIM LED Controller (2.4G)

Model: LC3-FR



Features

- Color temperature, brightness dimmable
- Biological rhythm and music rhythm
- Push dimming
- 4096 level smooth dimming, mini brightness 0.1%, dimming range 0.1%-100%
- One controller support max 12pcs remote (control distance 30m)
- Auto transmitting: transmit signal to another one automatically and expand unlimited control distance
- Support DND mode and usually used for power failure area to save power
- Support "TUYA SMART" APP control (Need 2.4G gateway)
- Support Alexa, Google Assistant, Yandex Alice (Need 2.4G gateway)






Parameters


Product Name:	3 in 1 CCT&DIM LED Controller	Working Temp.:	-10~40°C
Model No.:	LC3-RF	EMC Standard (EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.1.1
Input Voltage:	DC12~48V		
Output Current:	Single Color Mode: Max10A CCT Mode: Max 6A	Safety Standard (LVD) :	EN 61347-1: 2015+A1: 2021 EN 61347-2-11: 2001+A1:2019
Output Type:	Constant Voltage	Radio Equipment (RED):	ETSI EN 300 440 V2.2.1
Protocol:	2.4GHz RF	Certification:	CE, EMC, LVD, RED
Control Distance:	RF: 30M	Warranty:	5 Years
IP Rate:	IP20		



Connection Diagram

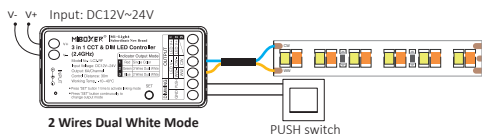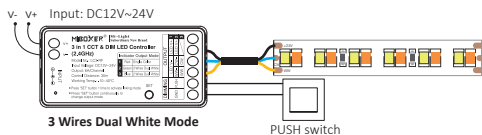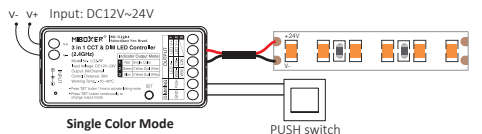

Application Diagram

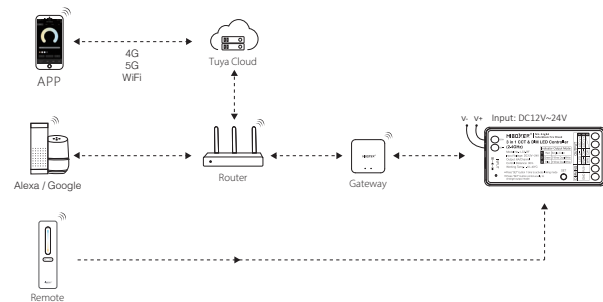

PUSH Switch Dimming

Short press the "PUSH switch"

Turn lights on or off.

Long press the "PUSH switch"

Adjust the light brightness level.

Set up output mode

Set up correct output mode based on the feature of lights

Setting method: Press "SET" button continuously to switch output mode (attention: it will log out without operation within 3 seconds)

Output mode sheet (confirm output mode based on color of indicator)

Indicator color	Red Light	Green Light	Blue Light
Output	Single Color Mode	3 Wires Dual White Mode	2 Wires Dual White Mode

Compatible with these 2.4G RF remote controls (Purchased separately)



FUT094



FUT006



FUT007



FUT087/ FUT087-B



S1-B / S1-W
S1-G



B1/ B1-B/ T1



B2/ T2



K1/ K1-B



K2/ K2-B



K3



C1




C3




Y2

2.4G RF Remote control instruction

Linking Code Instructions



Power off 10 seconds and power on again or short press " SET " one time



Short press " ON " button 3 times within 3 seconds.




Lights blink 3 times slowly means linking is done successfully.




Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

Unlinking Code Instructions



Power off 10 seconds and power on again or short press " SET " one time



Short press " ON " button 5 times within 3 seconds.




Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)

Transmitting function instruction

One Controller can transmit the signals from the remote control to another Controller within 30m, as long as there is a LED Driver within 30m, the remote control distance can be limitless.

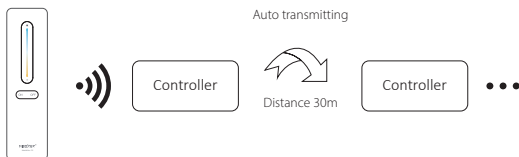

Attention: All "LED Driver" must be linked with one remote.

Turn Do Not Disturb mode on and off (ON by default)

Turn on "Do Not Disturb" (applicable to areas with frequent power outages to save energy)

Turn on Do Not Disturb mode:

Short press the "OFF" button 3 times within 3 seconds, and then short press the "ON" button 3 times. The light flashes 4 times to indicate success.

Note: When the lamp is powered on again after a power outage, its status (lights on or off) will remain the same as before the power outage.

Turn off Do Not Disturb mode:

Short press the "ON" button 3 times within 3 seconds, and then short press the "OFF" button 3 times. The light flashes 4 times slowly to indicate successful shutdown.

Note: When the lamp is powered on again after a power outage, its status will be on by default.

Attention

1. Please turn off power supply before installation.
2. Please ensure input voltage to be same as requirements from device.
3. Don't disassemble device if you are not expert, otherwise it will damage it.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.