








NEONLED

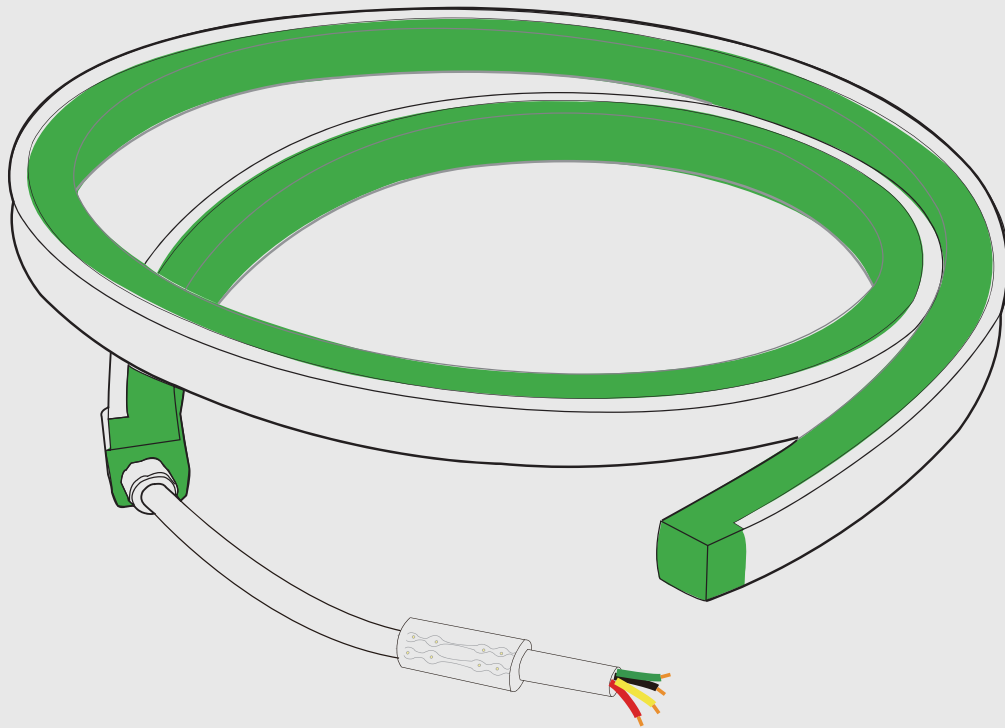


F18 Multi Color RGB Neon flex

Specification

Dimension

-  Gross weight: 0.43kg/m
-  Dimmable: DALI, DMX, PWM
-  Installation Temp.: 0°C to +55°C
-  Ambient Temp.: -25°C to +55°C
-  Min. Bending : 120mm
-  Beam Angle : 260 degree

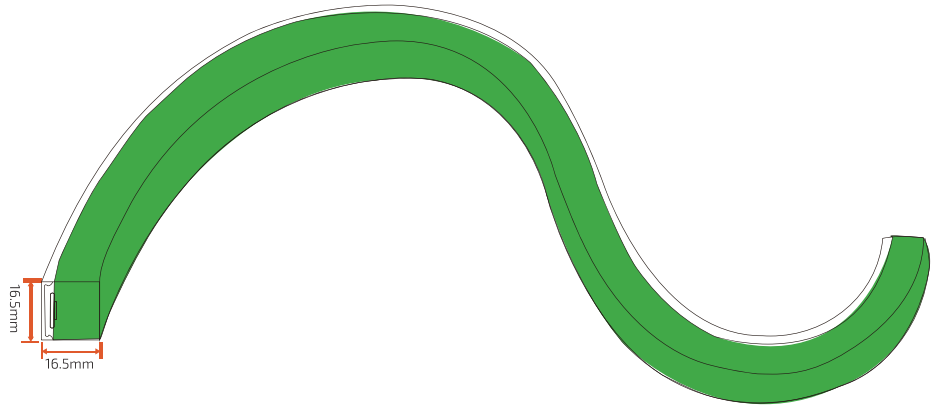

Eco-friendly PVC or Silicone Housing material optional

Features

- Uniform and even light output, three side emitting
- Flat surface with 260 degree beam angle
- 72 LEDs per meter, vertical bending
- Connect with Dali, DMX,PWM
- Full encapsulated with IP68 Level
- High Reliability
- 3 or 5 Years warranty

Applications

- Building facade, outline
- Cove lighting
- Sign and advertising lighting
- Linear lighting
- Additional lighting
- Decorative lighting




outdoor use



indoor use



Model Encoding

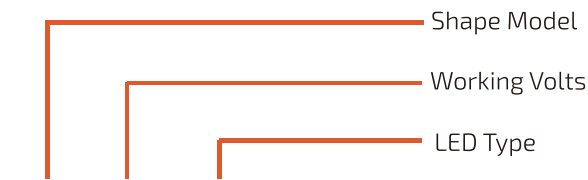

F18-24V-5050-72-13W-RGB



MJ **RGB** **S01SM**
 MJ-18-RGB-S01SM
 1 2 3 4 5

- 1** Mold injection
- 2** Multi color RGB
- 3** Connector entry type
- 4** Connector direction
- 5** Cable connector type

- 01----- right
- 02-----left
- 03-----double

- S----- Side entry
- D-----Direct entry
- B-----Bottom entry

- SM----- male connetor cable
- SF-----female connector cable
- SMF-----male & female connector cable
- Blank-----bare wire

For more information

Email: info@neonled.sk

Or visit www.neonled.sk

Technical Specification


Model	F18-24V-5050-72-RGB
Operating voltage	24V
Power consumption	13W/M
Working Mode	PWM CV
LED type	SMD5050
LED Quantity	72 pcs/m
Available Color	RGB
Min. cutting Unit	6 LEDs
Min. cutting length	8.33cm
Max. length single feed	10m
Max. length double feed	20m
Bending direction	Vertically
Lumen maintenance	70 000 Hours L70 25°C , 50 000 Hours L70 50°C
Housing material	Eco PVC or Silicone
Installation temperature	0°C to -55°C
Ambient temperature	-25°C to +55°C
Ingress protection	IP68 wet location submersible* to 2m
Warranty	3 years as standard, 5 years warranty maximum

Wave length

Red (R)	630-650nm
Green (G)	530-550nm
Blue (B)	465-475nm

Lumen Output F18-24V-5050-72-RGB

Red Color Lumen : >180lm/m

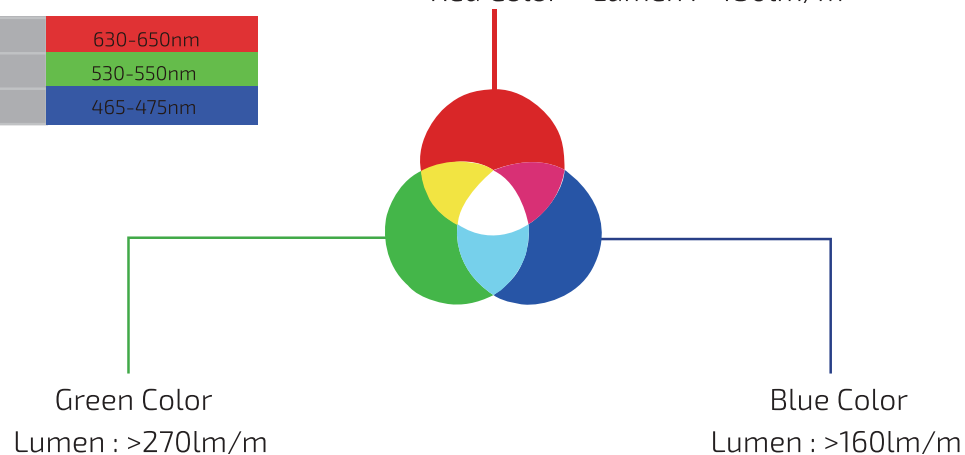


[For more information](#)

Email: info@neonled.sk


Or visit www.neonled.sk

Construction

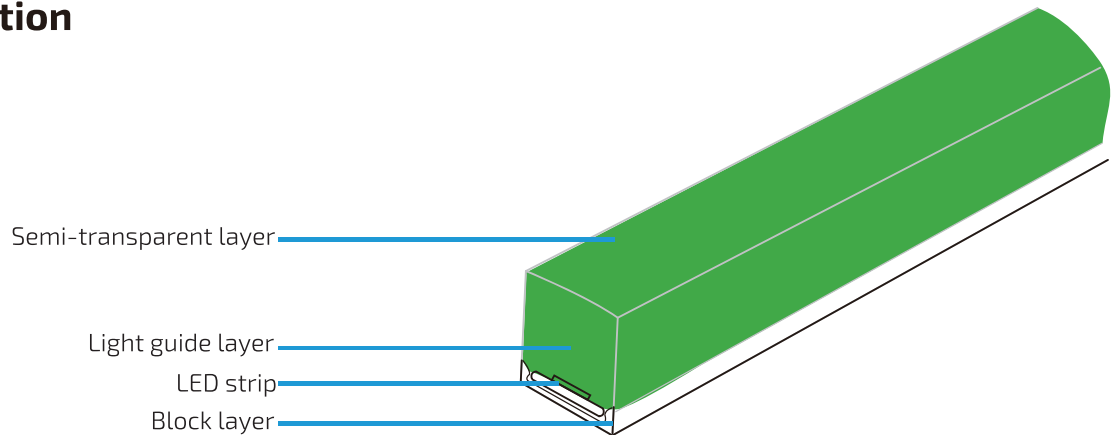


Physical Specification



Light profile

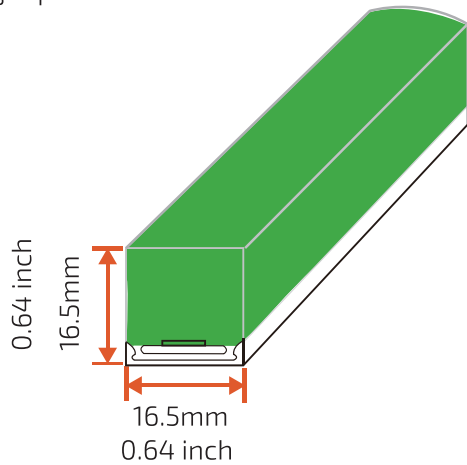

Bending direction

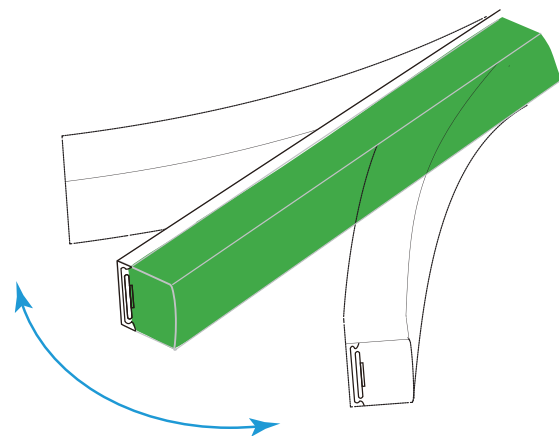

Min. bending diameter

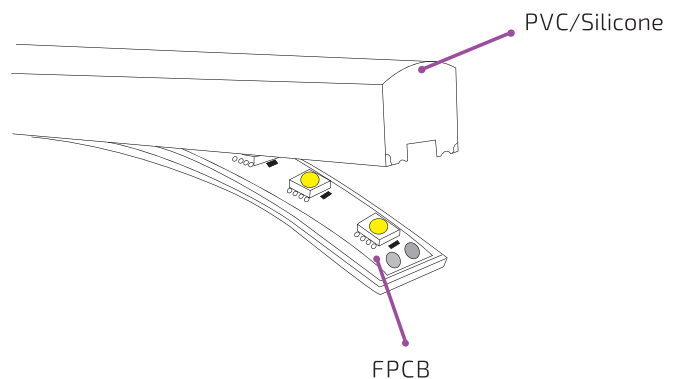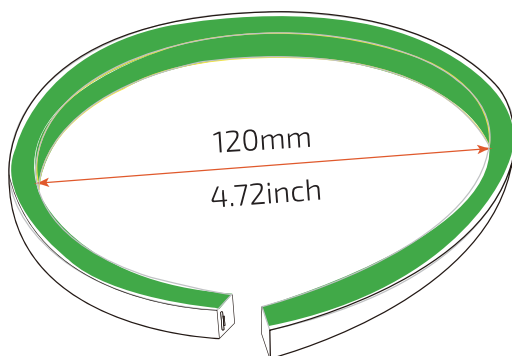


[For more information](#)

Email: info@neonled.sk

Or visit www.neonled.sk




Mold injection connector

(IP68 Factory Assembly only)






Direct entry Connector

- ① MJ-18-RGB-D01
- ② MJ-18-RGB-D01SM
- ③ MJ-18-RGB-D02
- ④ MJ-18-RGB-D02SF
- ⑤ MJ-18-RGB-D03
- ⑥ MJ-18-RGB-D03SFM

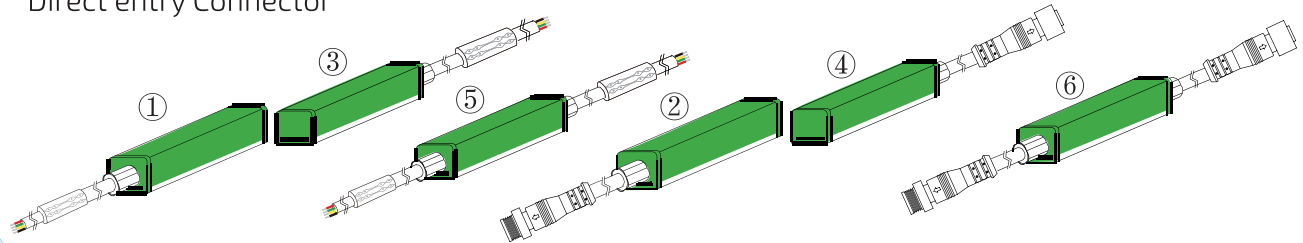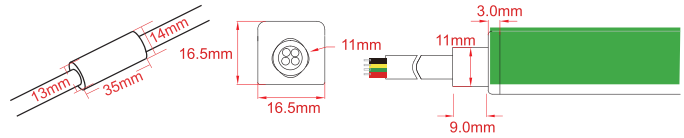



Side entry Connector

- ① MJ-18-RGB-S01
- ② MJ-18-RGB-S01SM
- ③ MJ-18-RGB-S02
- ④ MJ-18-RGB-S02SF
- ⑤ MJ-18-RGB-S03
- ⑥ MJ-18-RGB-S03SFM

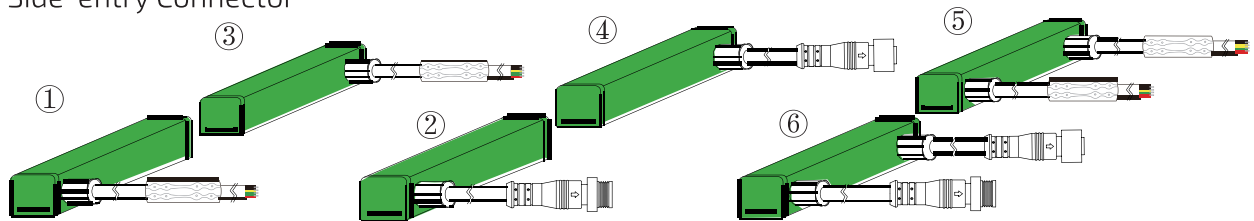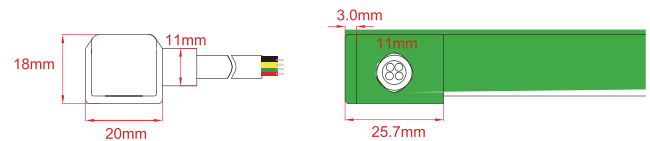

Bottom entry Connector

- ① MJ-18-RGB-B01
- ② MJ-18-RGB-B01SM
- ③ MJ-18-RGB-B02
- ④ MJ-18-RGB-B02SF
- ⑤ MJ-18-RGB-B03
- ⑥ MJ-18-RGB-B03SFM

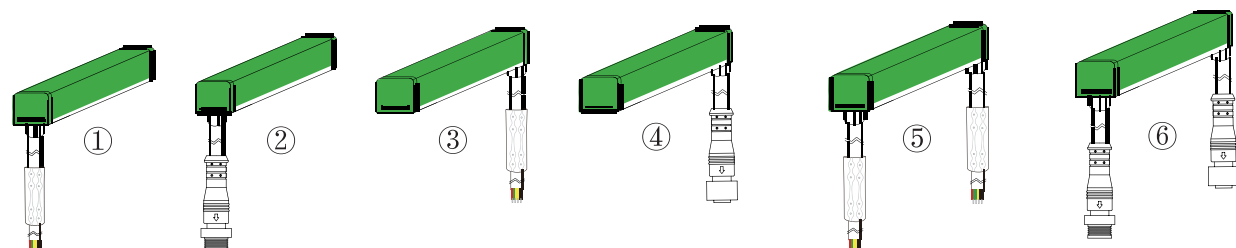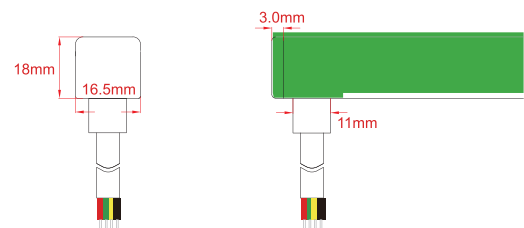


For more information



Email: info@neonled.sk

Or visit www.neonled.sk


DIY Screw & Snap Connector Kit




- ① MJ-18-RGB-L01
- ② MJ-18-RGB-L01SM
- ③ MJ-18-RGB-L02
- ④ MJ-18-RGB-L02SF
- ⑤ MJ-18-RGB-L03
- ⑥ MJ-18-RGB-L03SMF

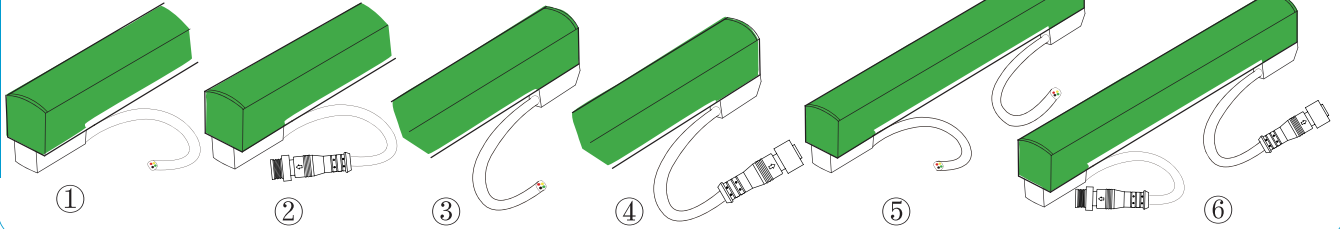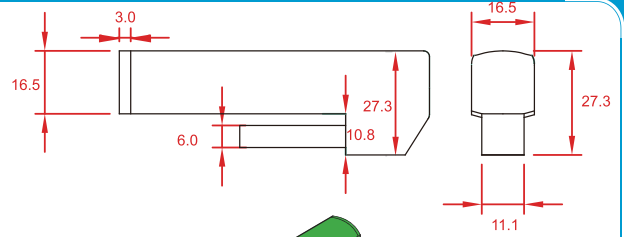


Mold injection Jumper

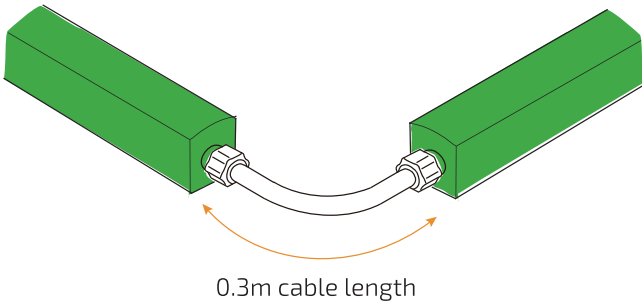

DIY screw splice connector kit

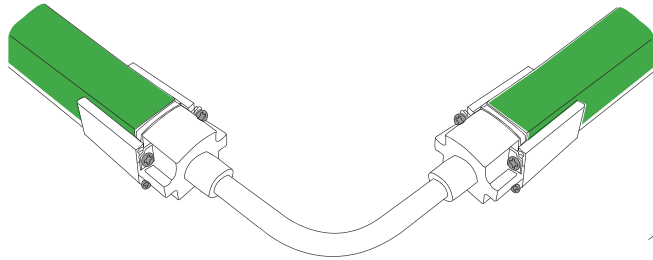


DIY screw connector kit

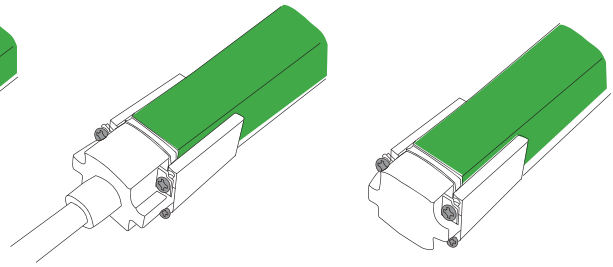


DIY screw front connector

DIY screw end cap

DIY snap splice connector kit

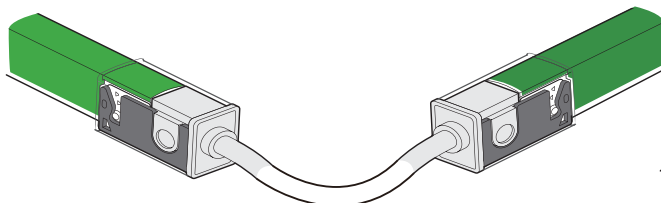

DIY snap connector kit

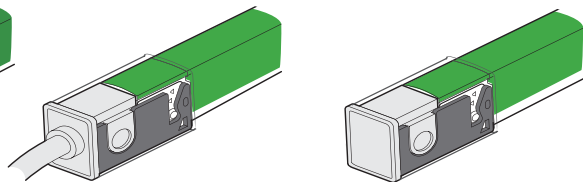

DIY snap front connector

DIY snap end cap


For more information

Email: info@neonled.sk


Or visit www.neonled.sk

Other Accessories

Female & Male Connector

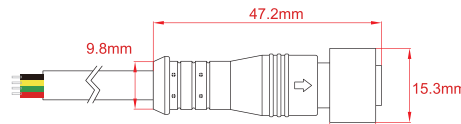


Female connector wire
SYZ-M12-F-4C-05-W

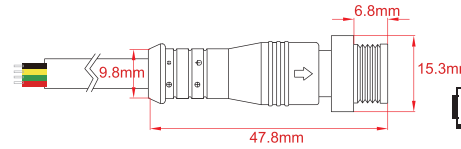


Male connector wire
SYZ-M12-M-4C-05-W



Middle power connector

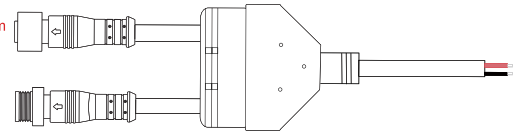


MID-CNR-RGB-1T2

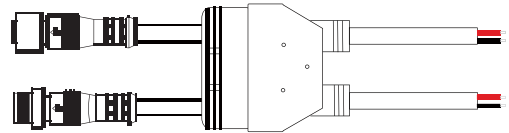


MID-CNR-RGB-2T2




LED Neon Cutter
ACC-TOOL-C1

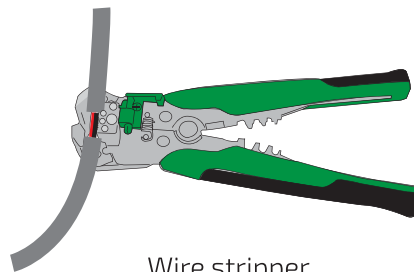


Wire stripper
ACC-TOOL-WS01

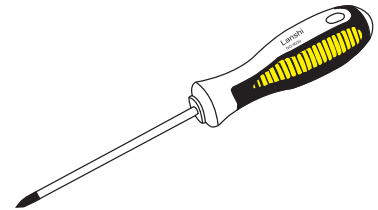


Screwdriver
ACC-TOOL-C2



Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-4P-F/ KJ-M12-4P-M



Silicone Rubber
K-5905



PVC End Cap
DIY-PVC-END-16



Assistant Tool
ACC-TOOL-C3

For more information

Email: info@neonled.sk

Or visit www.neonled.sk

Mounting Channel

Model	Description	Dimension	Drawing
ALC18S01	<p>Use for : F18</p> <p>Length option:1m,2m,35mm</p> <p>Material:Aluminum alloy+ Plastic</p> <p>Optional color:AS/AB/PW</p> <p>Type: Standard</p>		
ACC-HX-S2830C2	<p>Use for mounting channel for angle adjustment</p>		

Packing

Standard: Carton (Paper reel inside)



Fixture Length

787.4in(20m)

Paper Reel

D12.99*H6.18in(33*15.7cm)


Carton Dimension

33*33*18cm

Gross Weight

17.63 lbs (10.4 kg)

Custom: Carton (White box+plastic plate inside)

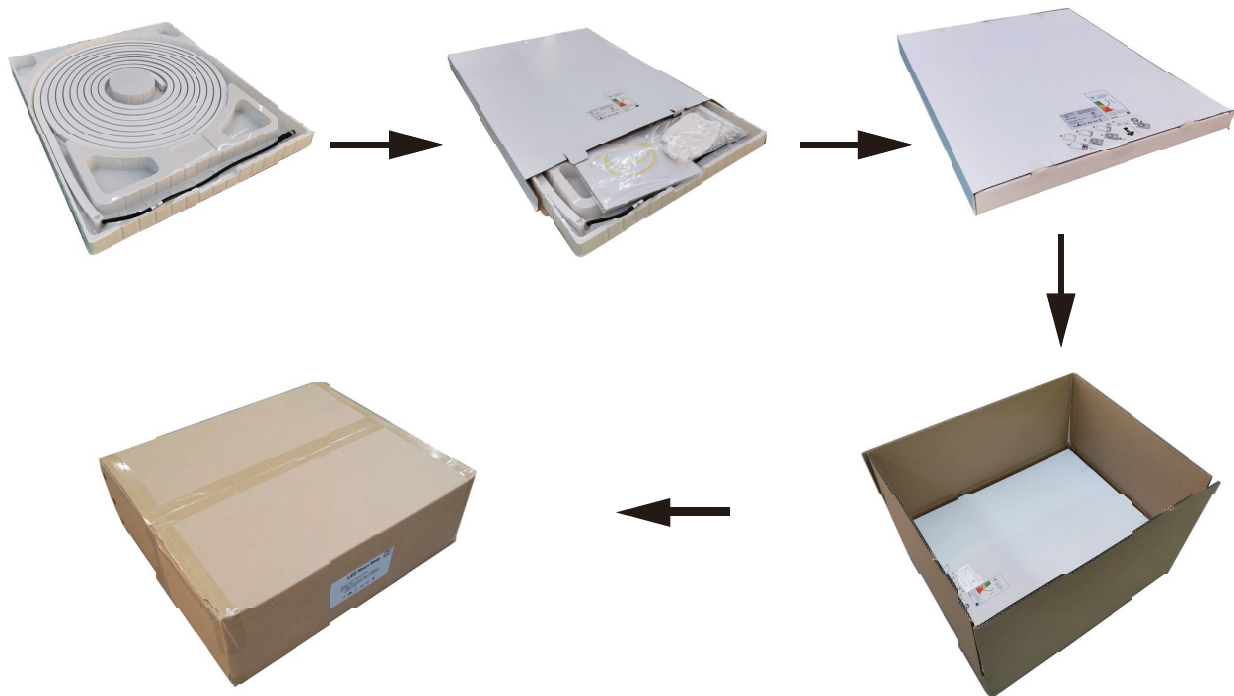

Fixture Length

393.7in(10m)

White box Dimension

21.6*1.38*18.9in(55*3.5*48cm)

Carton Dimension

57*49*19cm

White box Quantity

Max 5pcs

Gross Weight

57.32 lbs (26 kg)



F18 Multi color RGB led neon flex

Testing

1. Please note it is under normal range if there is 20-30% yellowing of PVC housing material when the product is used under direct sunlight or long-term high temperature & wet environment in 3 years.
2. About the tolerance range of optical parameters (luminance, CCT, Watt, RA) for all product, the volume is plus and minus 10% fluctuation referring to IEC Standard.
3. It's normal for the tolerance range in total length, it occurs from the different production technology, environmental temperature and installation. the volume would be 0.1-5M \pm 7mm, 5.1-10M \pm 15mm, 10.1-20M \pm 30mm.

[For more information](#)


Email: info@neonled.sk

Or visit www.neonled.sk

Loading Chart

Power supply

Rated power	35W	60W	75W	80W	100W	120W	150W	185W	240W	320W
13W	2m	3.5m	4.5m	4.8m	6m	7m	9m	10m	/	/

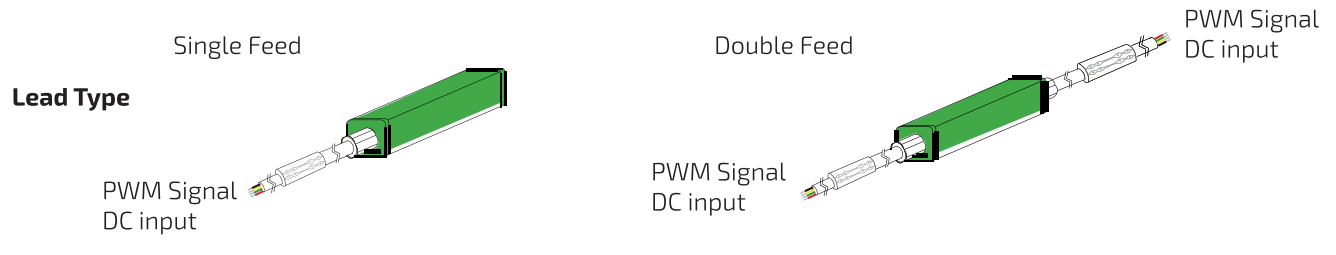

Note: These are the max recommended run lengths based on power supply
 For example: It is recommended to use one 80W power supply for a single-feed run of 4.8m at 13W/m.

Recommendation of extension wire

Maximum extension wire length according to Light power

Watts of light	22AWG 0.34mm ²	20AWG 0.53mm ²	18AWG 0.82mm ²	17AWG 1.04mm ²	16AWG 1.38mm ²	14AWG 2.07mm ²	12AWG 3.29mm ²	10AWG 5.62mm ²
10W	36m	60m	100m	120m	140m	240m	400m	600m
20W	18m	30m	50m	60m	70m	120m	200m	300m
30W	12m	20m	30m	38m	45m	80m	130m	200m
40W	8m	15m	22m	28m	35m	60m	95m	140m
50W	6m	12m	18m	22m	28m	48m	75m	105m
60W	5m	10m	15m	18m	22m	36m	60m	88m
70W	/	8m	12m	14m	18m	30m	50m	72m
80W	/	6m	10m	11m	14m	24m	40m	58m
90W	/	4m	7m	8m	10m	18m	30m	45m
100W	/	/	5m	6m	7m	12m	22m	32m
110W	/	/	3m	4m	5m	8m	15m	22m
120W	/	/	2m	2.5m	3m	0m	8m	12m

Note:

- The values doesn't include the 0.6m cable connected to the front connector.
- To ensure the reliability of wire connection and avoid problem of voltage drop, the extension wire length should be smaller than the above recommended values.

[For more information](#)

Email: info@neonled.sk

Or visit www.neonled.sk

